


## L Series

---

# Bill Acceptor

- Multinational currencies acceptable.
- New generation design of verification system.
- Anti-string technology.
- Selective interfaces.
- Multicolor illumination bezel design.
- Innovative bezel design.

(L70T/L77T)

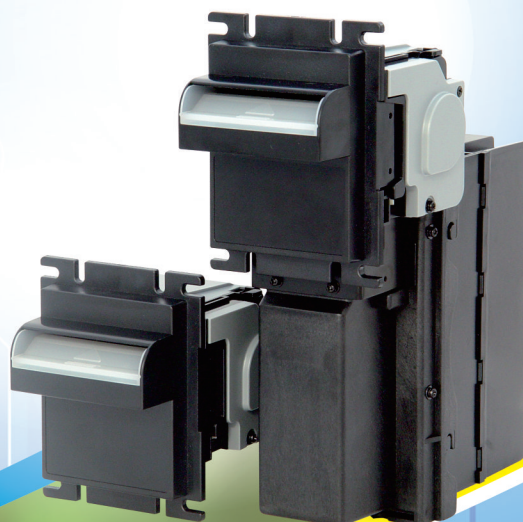

**ict**

## L Series

---


# Bill Acceptor

The L Series bill acceptor combines improved bill-sensing technology with lightweight and durable plastic construction. It also features fast software updating, and easy maintenance to increase acceptance rates and reduce bill jammed.




L70

L70-P5

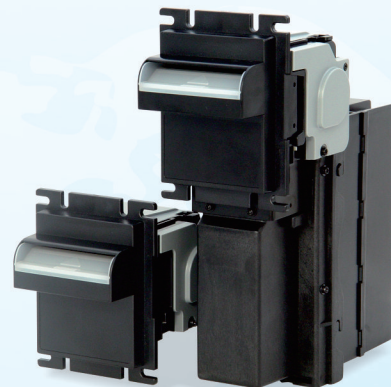

L77F

L77F-P5

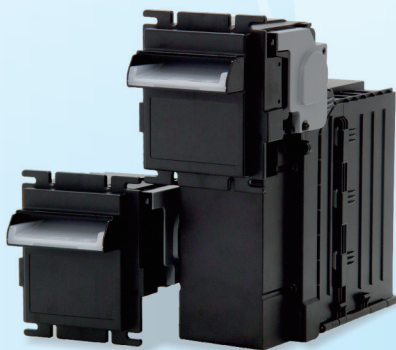

L83

L83-P6



Without  
metal bracket  
L70T-P5/ L77T-P5

With  
metal bracket  
L70T-P5/ L77T-P5

# L Series

## Specifications



### Acceptance Rate

96% or greater



### Bill Insertion

Four-way



### Bill Width Accepted

**L70-P2/P5, L70#-P2/P5, L70F-P2/P5:**  
59~67mm/ 2.32~2.64 inches(67mm)  
59~71mm/ 2.32~2.8 inches(71mm)

**L70T-P5:**  
65~70mm/ 2.56~2.75 inches

**L77F-P2/P5, L77T-P5:**  
72~77mm/ 2.83~3.03 inches

**L83-P3/P6, L83#-P3/P6:**  
61~83mm/ 2.40~3.27 inches



### Acceptance Speed

Approx. 3 seconds to cash box



### Capacity

**L70-P2, L70#-P2, L70F-P2:** Approx. 200 notes

**L70-P5, L70#-P5, L70F-P5:** Approx. 500 notes

**L77F-P2:** Approx. 150 notes

**L77F-P5:** Approx. 500 notes

**L83-P3, L83#-P3:** Approx. 300 notes

**L83-P6, L83#-P6:** Approx. 600 notes

**L70T-P5, L77T-P5:** Approx. 500 notes



### Interface

**L70-P2/P5, L70#-P2/P5:**  
Pulse, RS232, RS232 A0, ccNet (compatible),  
MDB, ccTalk

**L70(IGT)-P2/P5:**  
Pulse, RS232, RS232 A0, IGT

**L70F-P2/P5, L77F-P2/P5:**  
Pulse, RS232, RS232 A0, ccNet (compatible),  
MDB, ccTalk, Pulse(Out of service)

**L83-P3/P6:**  
Pulse, RS232, RS232 A0, ccNet (compatible),  
MDB, ccTalk, GBA, Parallel, Parallel A4,  
Pulse(Out of service)

**L83#-P3/P6:**  
Pulse, RS232, RS232 A0, ccNet (compatible),  
MDB, ccTalk, GBA, Pulse(Out of service)

**L70T-P5, L77T-P5:**  
Pulse, RS232, RS232 A0, ccNet (compatible),  
MDB, ccTalk, V2.2, Pulse(Out of service)



### Power Source

**L70#/ L70F/ L77F/ L83#/ L70T/ L77T:**  
12V DC(10~16V DC)

**Others:** 12V DC(10.8~13.2V DC)



### Power Consumption

Standby: 0.3A, 3.6W  
Operation: 1.2A, 14.4W  
Maximum: 2A, 24W



### Dimension

**L70, L70#, L70F:**  
102.8 x 134.0 x 132.1 mm/ 4.05 x 5.28 x 5.20 inches

**L70-P2, L70#-P2, L70F-P2:**  
102.8 x 285.7 x 188 mm/ 4.05 x 11.25 x 7.40 inches

**L70-P5, L70#-P5, L70F-P5:**  
102.8 x 285.7 x 216.8 mm/ 4.05 x 11.25 x 8.54 inches

**L77F:**  
102.4 x 134 x 131 mm/ 4.03 x 5.28 x 5.16 inches

**L77F-P2:**  
102.4 x 272.6 x 172.8 mm/ 4.03 x 10.73 x 6.80 inches

**L77F-P5:**  
102.4 x 272.6 x 221.2 mm/ 4.03 x 10.73 x 8.71 inches

**L83, L83#:**  
117.4 x 86.1 x 138.5 mm/ 4.62 x 3.39 x 5.45 inches

**L83P3, L83#-P3:**  
121.7 x 265.5 x 222.2 mm/ 4.79 x 10.45 x 8.75 inches

**L83P6, L83#-P6:**  
121.7 x 265.5 x 269.2 mm/ 4.79 x 10.45 x 10.6 inches

**L70T-P5, L77T-P5:**  
Without metal bracket: 252.6 x 106.8 x 230.6 mm/  
9.94 x 4.20 x 9.08 inches  
With metal bracket: 357 x 136.4 x 234.1 mm/  
14.79 x 5.37 x 9.22 inches



### Weight

**L70, L70#, L70F:** Approx. 0.52kg/ 1.15 lbs

**L70-P2, L70#-P2, L70F-P2:** Approx. 1.25kg/ 2.76 lbs

**L70-P5, L70#-P5, L70F-P5:** Approx. 1.4 kg/ 3.09 lbs

**L77F:** Approx. 0.44kg/ 0.97 lbs

**L77F-P2:** Approx. 1.35kg/ 2.98 lbs

**L77F-P5:** Approx. 1.42kg/ 3.13 lbs

**L83, L83#:** Approx. 0.8 kg/ 1.76 lbs

**L83-P3, L83#-P3:** Approx. 1.46kg/ 3.22 lbs

**L83-P6, L83#-P6:** Approx. 1.65kg/ 3.64 lbs

**L70T-P5, L77T-P5:** Approx. 1.42kg  
(Without metal bracket)  
Approx. 7kg  
(With metal bracket)



### Environmental

Operation Temperature:

**L70/ L83:** 0°C/ 32°F~55°C/ 131°F

**L70F/ L77F/ L70T/ L77T:** 0°C/ 32°F~60°C/ 140°F

**L70#/ L83#:** 0°C/ 32°F ~65°C/ 149°F



Storage Temperature: -20°C/ -4°F~70°C/ 158°F

Humidity: 30%~85% RH (no condensation)



### Recommended Applications

Amusement, Gaming, Vending



**ict**

Specifications are subject to change without prior notice.





## **International Currency Technologies**

No.28, Ln. 15, Sec. 6, Minquan E. Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Phone: +886-2-2793-1236

Fax: +886-2-2793-6125

E-Mail: [sales@ictgroup.com.tw](mailto:sales@ictgroup.com.tw) (Product Information)

[fae@ictgroup.com.tw](mailto:fae@ictgroup.com.tw) (Technical Service)

Website: [www.ictgroup.com.tw](http://www.ictgroup.com.tw)

---