Jofemar
VENDING

B L U E T E C

BLUETEC 15/20	BLUETEC 15/30	BLUETEC 21/24	BLUETEC 21/40	BLUETEC 31/24	BLUETEC 31/40

VANDAL-PROOF LOCK

OPTIMISED CAPACITY AND VOLUME

ENERGY-SAVING LED LIGHTING

BANKNOTE AND COIN MECHANISM PAYMENT SYSTEMS

BLUETEC

State-of-the-art technology, elegant design

The Bluetec range has been developed to guarantee an added-value service in establishments, achieving a perfect integration of maximum capacity, great number of selections and an innovative design, with a finish of stainless steel and glass, which provides an elegant and modern image. Its front panel, with a graphic touchscreen and LED lighting in the selection buttons and the product exit, provides a striking new look, at the same time it allows a simple and clear presentation of the brands. This ensures a more intuitive usage and improves, without a doubt, the purchasing experience.

FEATURES
- Vertical column loading system to speed up loading.
- Graphic display with animations, texts and designs, updatable through USB.
- Independent detection of sold out products by channel.
- Continuous performance self-testing.
- Remote age control.
- Capacitive touch keypad.

STRUCTURE
- 1.5mm-thick steel-plate cabinet treated against corrosion and rust.
- Front in smudge-proof stainless steel and tempered glass.
- Internal vandal-proof lock and three anchor points.
- Cash box with lock and optional auto-locking during extraction.
- Energy-saving LEDs lighting in the front panel, selection buttons and delivery drawer.
- Built-in casters for ease of displacing.

CREDIT MANAGEMENT
- Innovative Jofemar coin mechanism with five return tubes for five different coin values.

- Anti-fraud coin validator with parameter analysis, such as diameter, metal composition or magnetic property. Features anti-thread system.
- Jofemar banknote reader.
- MDB protocol.

PROGRAMMING
- General on site programming of all the machine functions.
- Optionally, it can be programmed with the EasyFlash hand terminal. Database creation and stock control and accounting.
- Telemetry programming option.
- Dynamic programming that allows grouping up keys and channels in different setups.
- DEX protocol data extraction (optional).

OPTIONS
- Electronic price display for each selection.
- Telemetry by GSM or GPRS modem using Jofemar Vending Track software. Price and working mode remote programming; alerts when the product is sold out.
- Lockable keypad.

BLUETEC MODEL	15/20	15+5/20	15/30	15+5/30	21/24	21+8/24	21/40	21+8/40	31/24	31+8/24	31/40	31+8/40
Selections	20	20	30	30	24	24	40	40	24	24	40	40
Complete/split channels	15	10/10	15	10/10	21	13/16	21	13/16	31	23/16	31	23/16
Capacity (packages)	620	597	620	597	881	843	881	843	1,193	1,155	1,193	1,155
Size (mm)	1,700 x 600 x 446				1,700 x 785 x 446				1,700 x 785 x 596			
Weight (kg)	128.2	135.8	128.2	135.8	155.2	173.6	155.2	173.6	196.8	208	196.8	208
Estimated energy consumption	30W	30W	30W	30W	40W	40W	40W	40W	40W	40W	40W	40W

CAPACITY DIAGRAM

BLUETEC 15 · BLUETEC 15+5

Top view with channel numbering

7 8 9 10 11 12 13 14 15

1 2/16 3/17 4/18 5/19 6/20

Individual capacity per channel

| 43 | 43 | 43 | 43 | 28 | 28 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | 44 |

Total capacity BLUETEC 15: **620**

| 43 | 21 17 | 21 17 | 21 17 | 5 17 | 5 17 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | 44 |
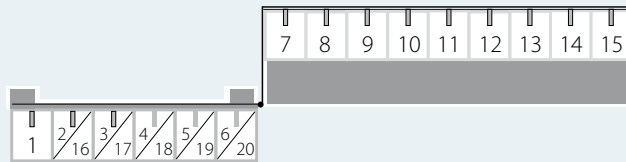
Total capacity BLUETEC 15+5: **597**

BLUETEC 21 · BLUETEC 21+8

Top view with channel numbering
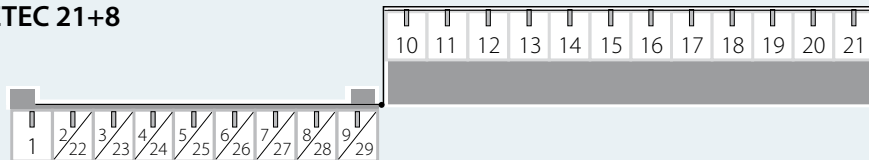
10 11 12 13 14 15 16 17 18 19 20 21

1 2/22 3/23 4/24 5/25 6/26 7/27 8/28 9/29

Individual capacity per channel

| 43 | 43 | 43 | 43 | 43 | 43 | 43 | 28 | 28 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | 44 |

Total capacity BLUETEC 21: **881**

| 43 | 21 17 | 21 17 | 21 17 | 21 17 | 21 17 | 21 17 | 5 17 | 5 17 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | 44 | 44 |

Total capacity BLUETEC 21+8: **843**

BLUETEC 31 · BLUETEC 31+8

Top view with channel numbering

10 11 12 13 14 15 16 17 18 19 20 21
22 23 24 25 26 27 28 29 30 31

1 2 3 4 5 6 7 8 9

Individual capacity per channel

| 43 | 43 | 43 | 43 | 43 | 43 | 43 | 28 | 28 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 |
| | | | | | | | | | 36 | 36 | 36 | 36 | 36 | 36 | 36 | 36 | 36 | 36 |
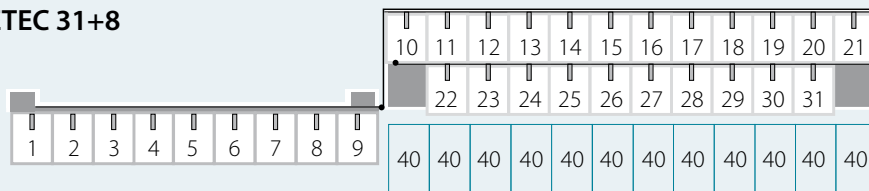
Total capacity BLUETEC 31: **1.193**

Top view with channel numbering

10 11 12 13 14 15 16 17 18 19 20 21
22 23 24 25 26 27 28 29 30 31

1 2/22 3/23 4/24 5/25 6/26 7/27 8/28 9/29

Individual capacity per channel

| 43 | 21 17 | 21 17 | 21 17 | 21 17 | 21 17 | 21 17 | 5 17 | 5 17 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 |
| | | | | | | | | | 36 | 36 | 36 | 36 | 36 | 36 | 36 | 36 | 36 | 36 |
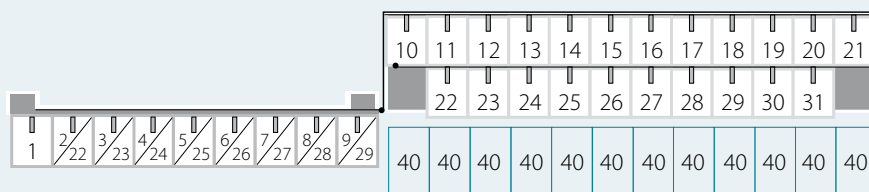
Total capacity BLUETEC 31+8: **1.155**

Jofemar
VENDING

Technological
Innovation

Reliability

100% Jofemar
Technology

Management
System
ISO 9001:2008
ISO 14001:2004
TÜVRheinland
CERTIFIED
www.tuv.com
ID 0091006722

CE